Waterbath

WTB11

Ideal for the temperature control of ointments, emulsions, samples, plates and nutrient solutions in the laboratory, as well as warm storage and calibration in the industrial segment

On this page, you can find all the essential technical data on the Memmert water bath. Our customer relations team will be pleased to help if you want further information. If you should require a customised special solution, please contact our technical specialists at sales@memmert.com.

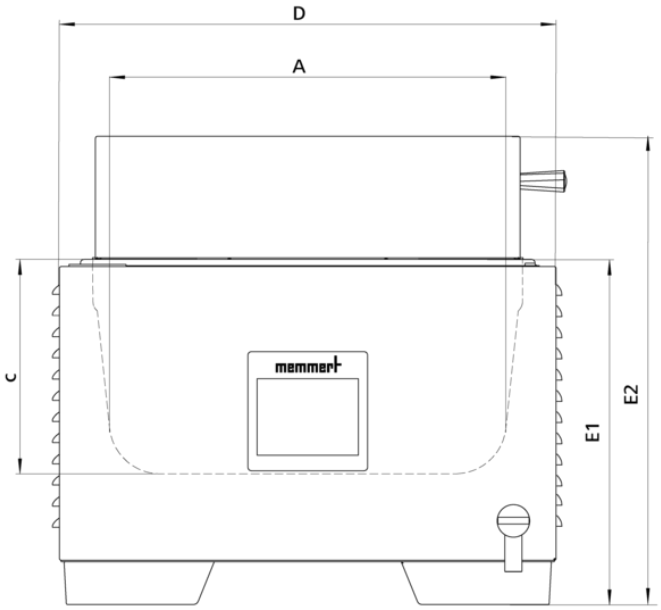

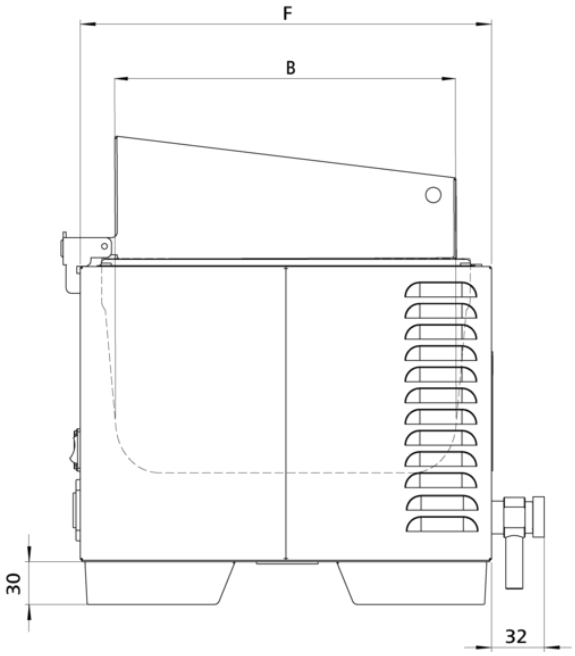

Memmert GmbH + Co. KG | Tel. +49 (0) 9122/925-0 | E-Mail info@memmert.com

Temperature

Working temperature range	at least 5 above ambient to +100 (depending on ambient pressure)
Setting temperature range	+10 to +100 °C
Setting accuracy temperature	0.1 °C

Control of standard components

Controller	intuitive 3.5" colour graphic display with touch screen

Safety

Temperature control	Independent temperature limiter to switch off the heating in case of failure

Heating concept

Heating	corrosion-proof large-area heating on the outside of the interior

Stainless steel interior

Interior	Deep-drawn stainless steel tray (stainless steel W.St. 1-4301), without corners and edges for easy cleaning incl. central drain (no disturbing installations)
Dimensions W x H x D in mm	$w_{(A)}$ x $h_{(C)}$ x $d_{(B)}$: 267 x 200 x 207 mm
Volume	10 l

Textured stainless steel casing

Dimensions	$w_{(D)}$ x $h_{(E2)}$ x $d_{(F)}$: 349 x 378 x 289 mm

Electrical data

Voltage **Electrical load**	230 V, 50/60 Hz approx. 1000 W
Voltage	230 V, 50/60 Hz
Voltage **Electrical load**	115 V, 50/60 Hz approx. 1000 W

Ambient conditions

Installation	The vent openings in the left and back side must remain unobstructed. Minimum wall spacing on all sides is 80 mm. The minimum spacing from the top of the bath to the next ceiling is 750 mm.
Ambient temperature	+5 °C to +40 °C
Humidity rh	max. 80 %, non-condensing
Overvoltage category	II
Pollution degree	2

Packing/shipping data

Transport information	The appliances must be transported upright
Customs tariff number	8419 8998
Country of origin	Federal Republic of Germany
WEEE-Reg.-No.	DE 66812464
Dimensions approx incl. carton	w x h x d: 570 x 450 x 380 mm
Net weight	approx. 7 kg
Gross weight carton	approx. 12 kg

Standard units are safety-approved and bear the test marks

Memmert GmbH + Co. KG | Tel. +49 (0) 9122/925-0 | E-Mail info@memmert.com